



*Invisible
connections®*

- Reduces production costs
- Reduces assembly costs

TSS 25 L Connector for flight to landing

Five in one connector!

Connector flight to landing

Remove the nib with this elegant 25kN connector for stair flight to landing.

Lifting

Approved for lifting in production and installation

Leveling adjustment


Fast and easy leveling flight to landing.
No need for shimming.

Reinforcement included

No need for local reinforcement.


Sound reduction

TSS 25 L with GB TSS 25 L reduce impact sound by 20-28 dB.

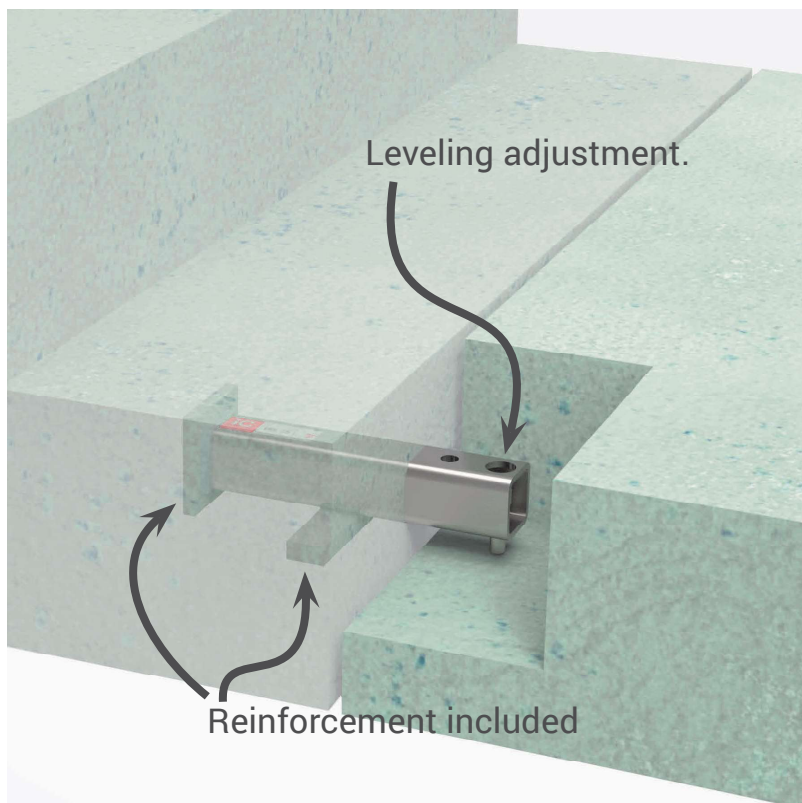

www.invisibleconnections.no

Reduced production cost

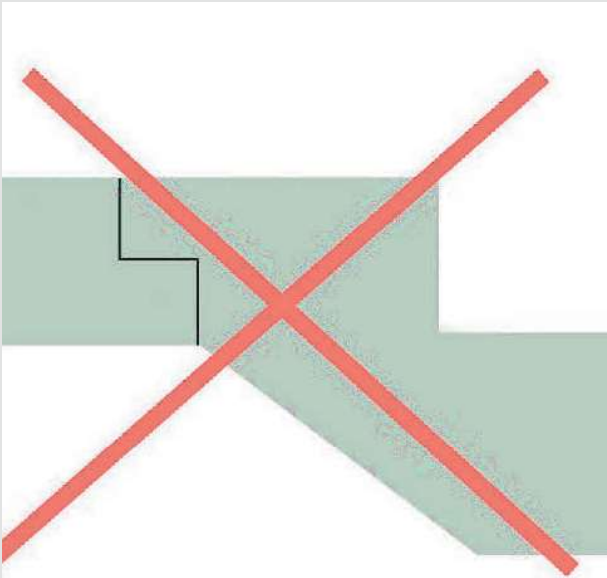

Less reinforcement steel


Reduces reinforcement steel in nib

Simpler formwork

Save formwork and material

Thinner landing 265 → 170 mm

Less concrete - Sustainable

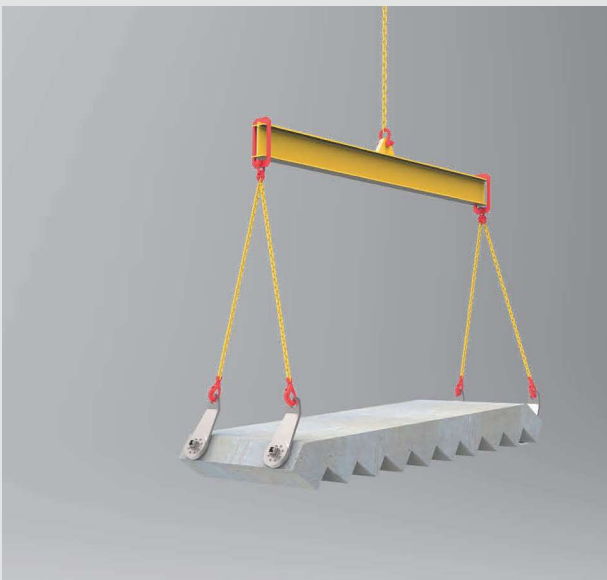


Reduced freight costs

Lighter weight for landing/stair

No use for lifting anchors

No lifting anchors for handling in factory, no extra lifting anchors needed for installation

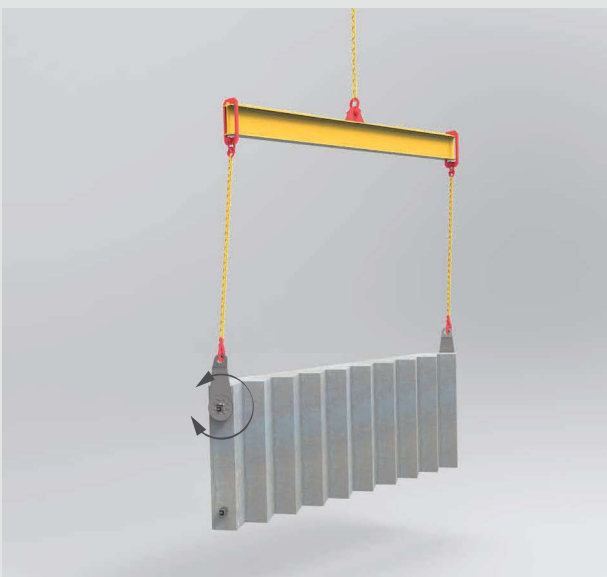


Reduced work for turning stair

Reduced work for turning stair
Reduced damaged when you turn stair


Reduced installation cost

Installation on site

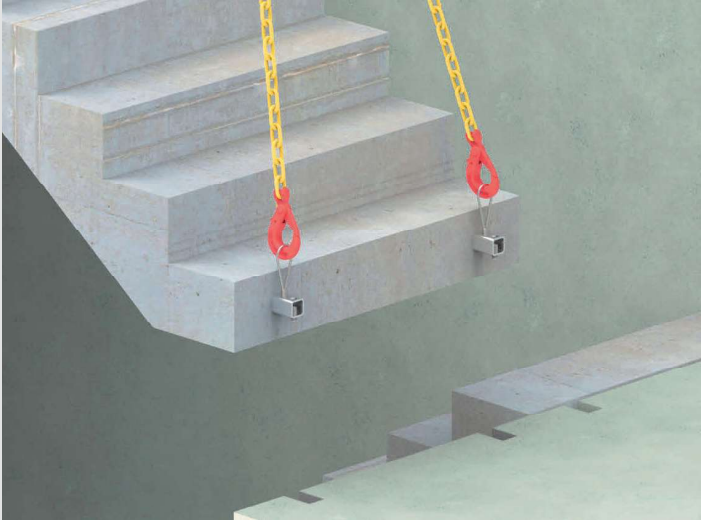


- Reusable
- Reduced working time
- Less shims
- No flicking of lifting anchor
- Reduced cost for temporary staircase
- Reduced cost for soundreduction connected to main floor
- Access stair before casting

Fast and easy adjustment

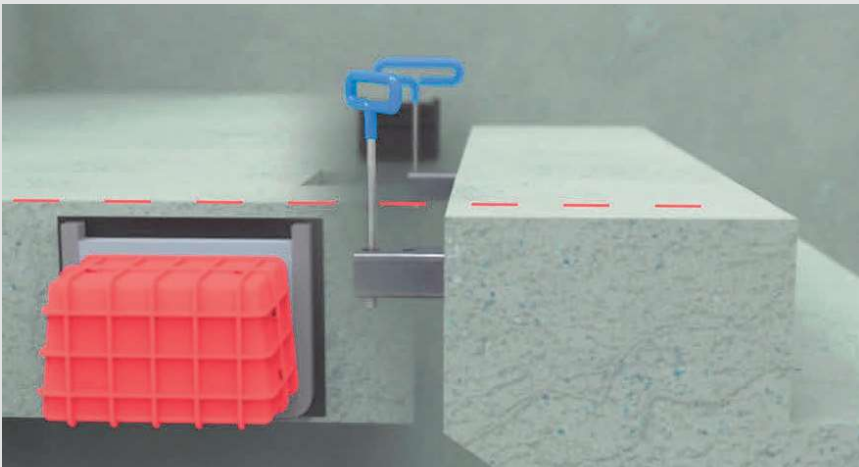


TSS 25 L w/soundreduction connected to main floor/landing/filigree slab

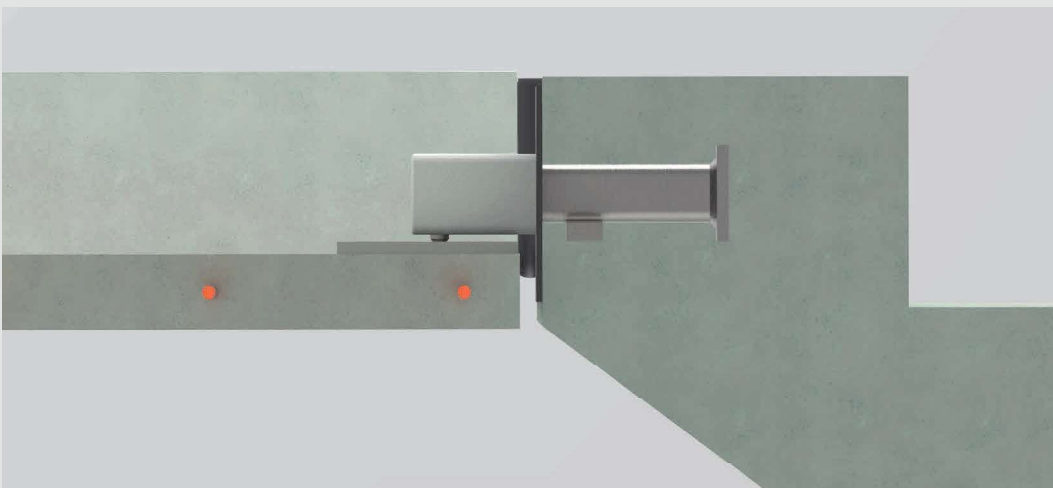






TSS 25 L, between two floors: two stairs, two landings.

	Part no	Text	no
	TSS 25 L	Stair/Landing connector w/ lift 25 kN	8

TSS 25 L, between two floors: connect to main floor w/soundreduction.

	Part no	Text	no
	TSS 25 L	Stair/Landing connector w/ lift 25 kN	8
	GF 25 L	Rubber flange	4
	GB TSS 25 L	Sound reduction box	4